



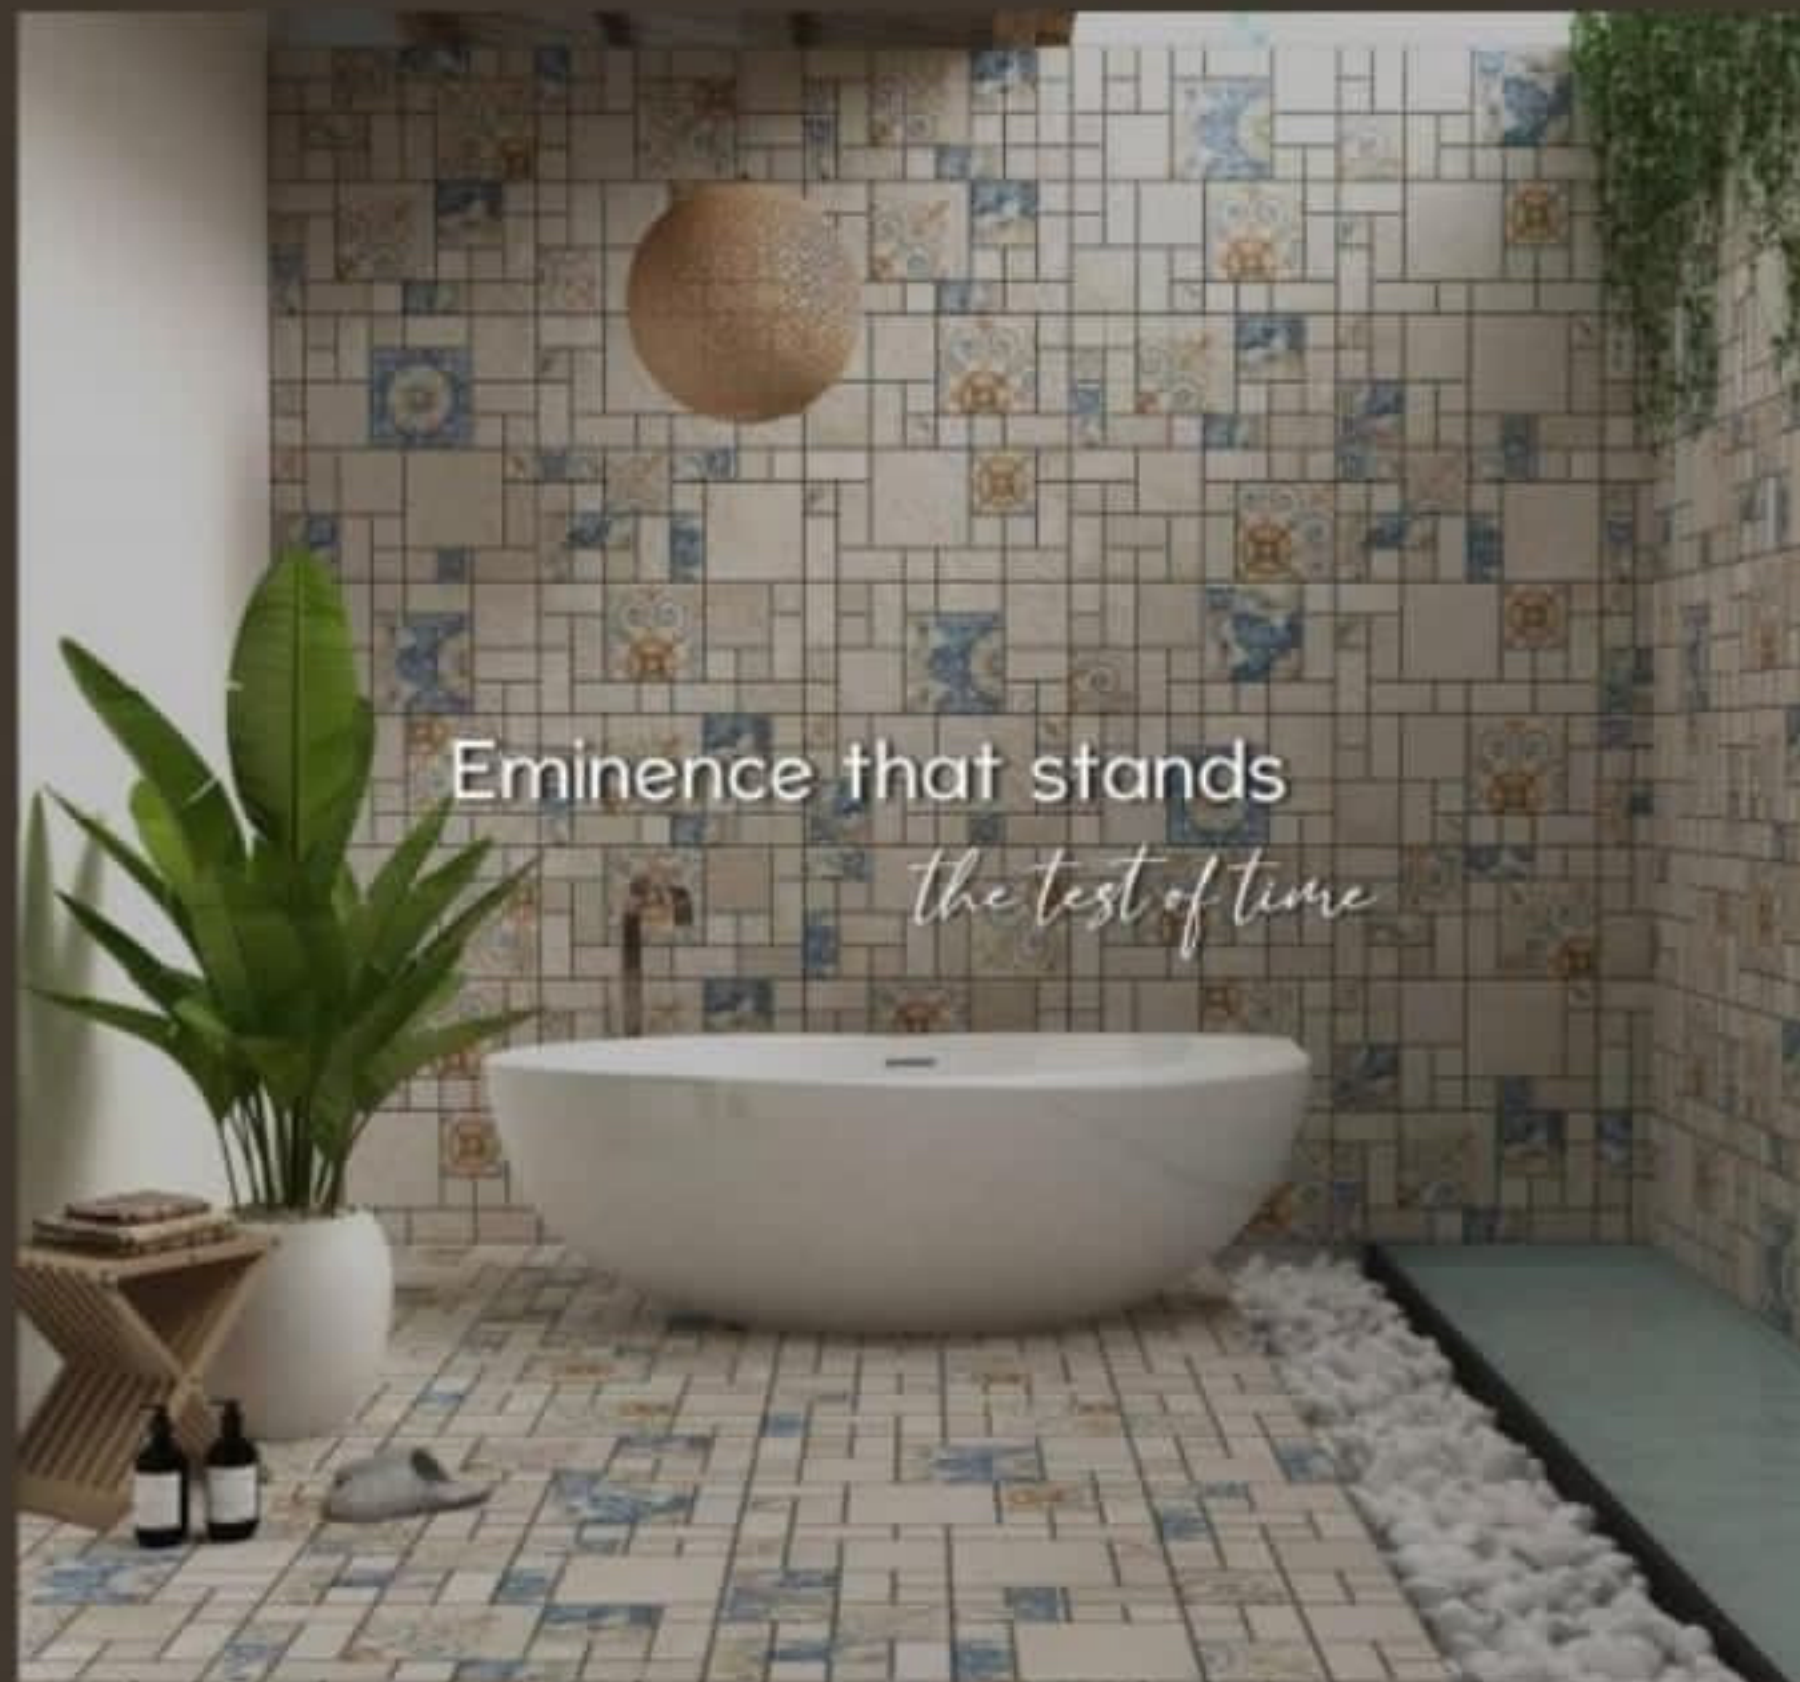

Eminence that stands
the test of time

30X60CM
EARTH COLLECTION
(CITRON SERIES)

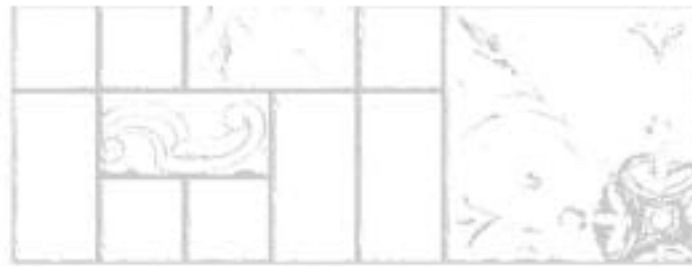


DEFINE RULES OF EMINENCE

Rey Plus, a company founded in 2003, has been manufacturing and selling integral porcelain tiles for all kinds of flooring and wall tiling solutions.

The manufacturing plant and main offices in Morbi, Gujarat IN, and the Worldwide logistics warehouses, make it possible to supply and deliver all the items in customers' orders. Through its national and international distribution network, Rey Cera exports tiles to more than 85 countries in all five continents.

As a result of our commitment to quality, all of our products comply with the guidelines of the ISO 9001:2000 standard, which guarantees that our research, development and commercializations are carried out with the maximum guarantees.

www.reycera.com

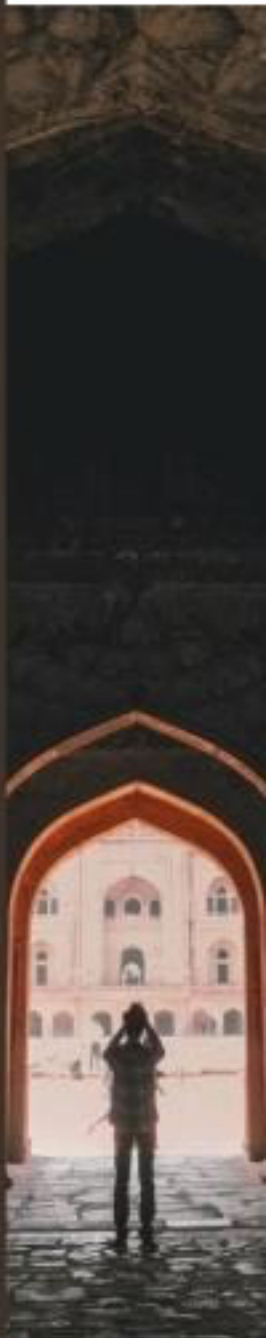

INDELIBLE SINGS OF HISTORY

Our Rustic Matt Finish gives easy solutions to urban areas and heavy traffic places. The best extruded GVT tile with 12 mm thickness and an antislip rate R11. Earth Collection Tiles are highly resistant against abrasion, as well as a strong bending resistance. Earth Collection is perfect for pedestrian areas, squares in the city, traffic areas, entrance of houses, urban area and all kind of heavy duty areas.



4
RANDOM
MOLD



GROUT
TO BE FILLED
AFTER LAYING



12MM
THICKNESS



RUSTIC
MATT FINISH



ZONAS RESIDENCIALES
RESIDENTIAL AREAS



PASEOS URBANOS
URBAN AREAS



TERRAZAS Y PATIOS
TERRACE & PATIOS



ZONAS COMERCIALES
COMMERCIAL AREAS





PISTINAS
SWIMMING POOLS



JARDINES
GARDENS




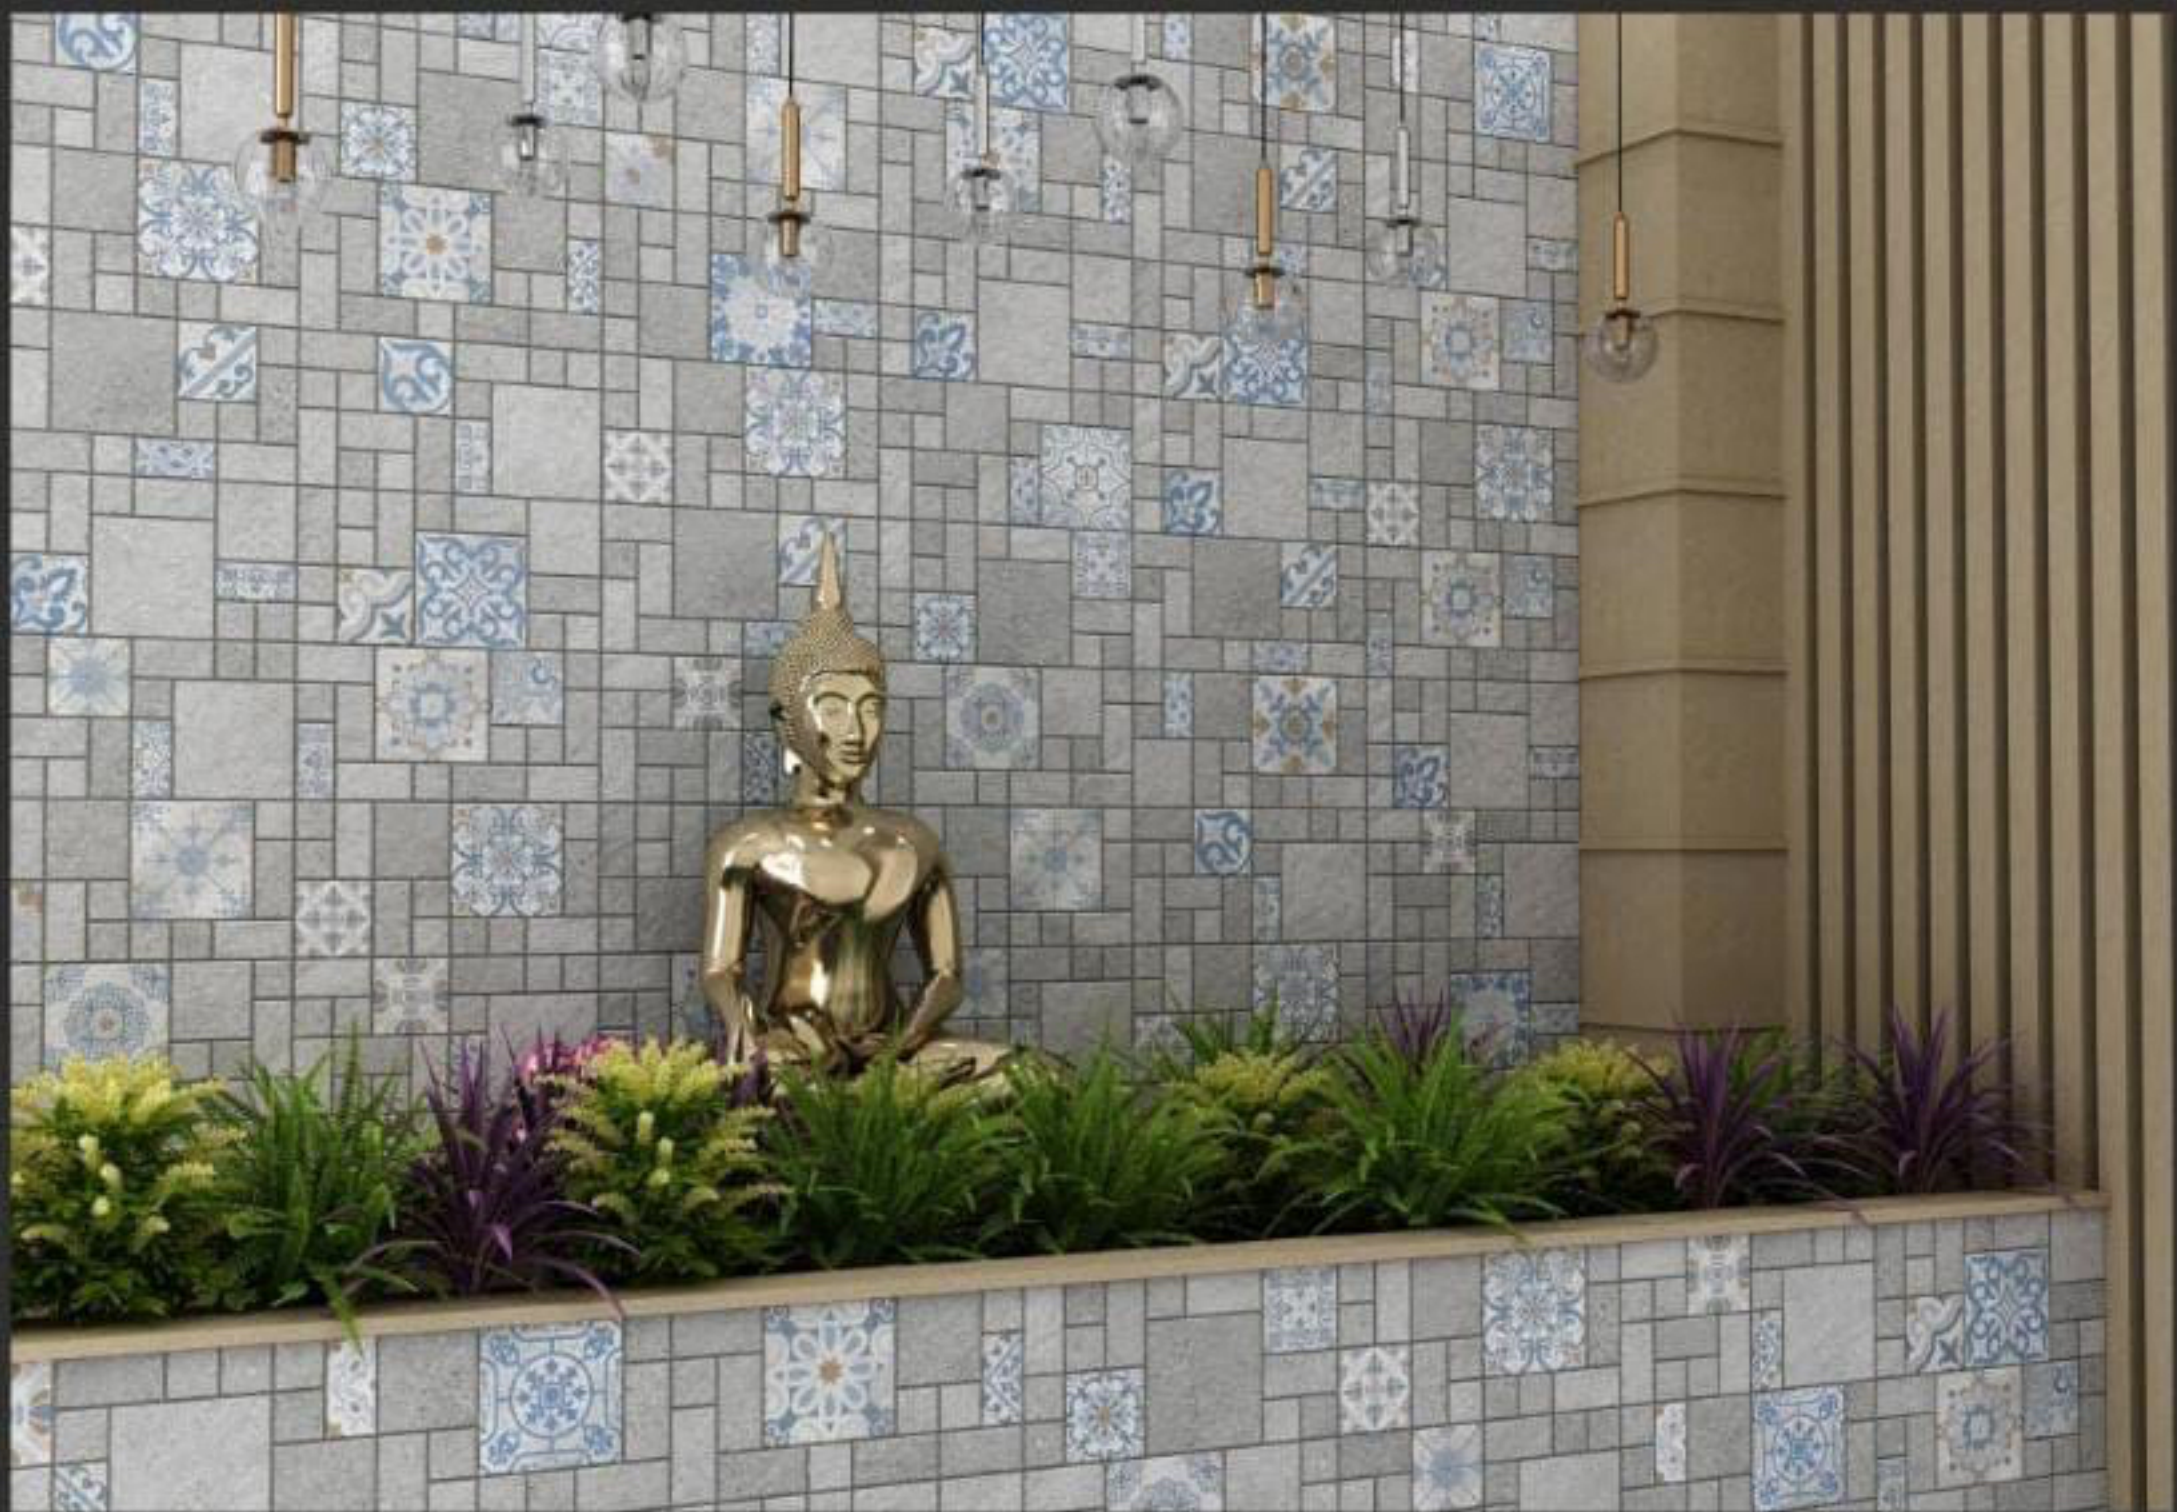

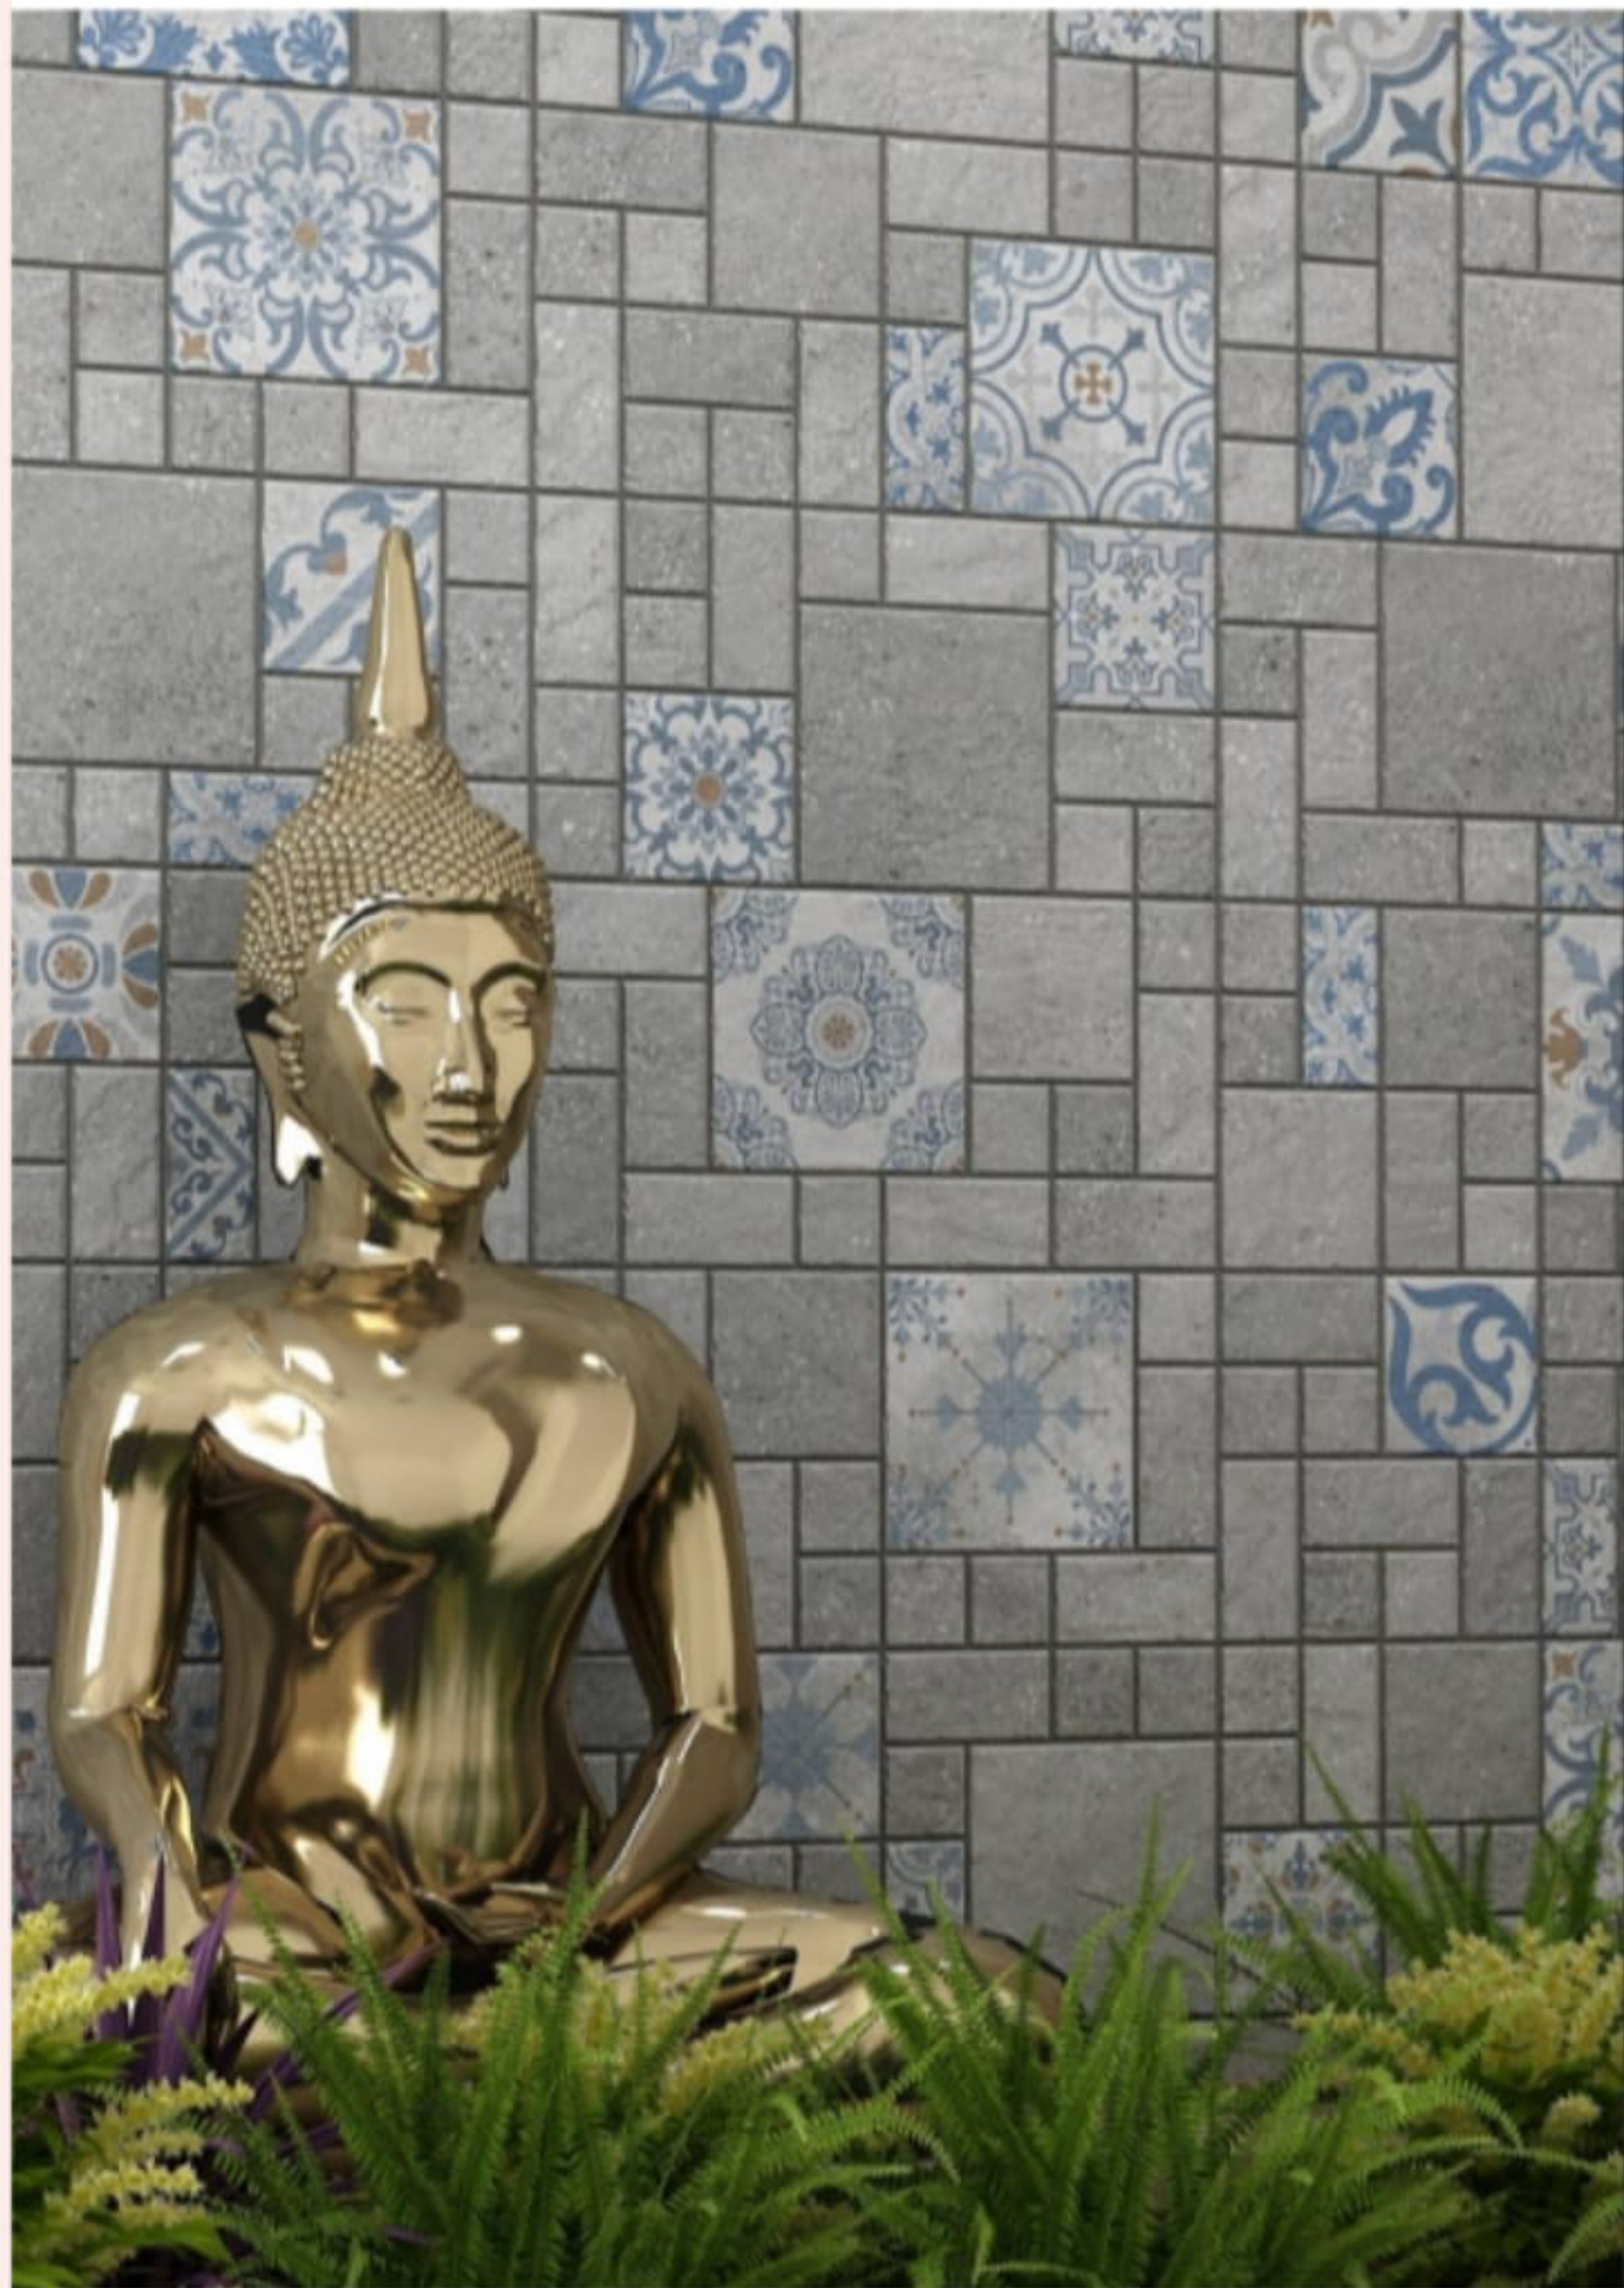

CITRON GREY



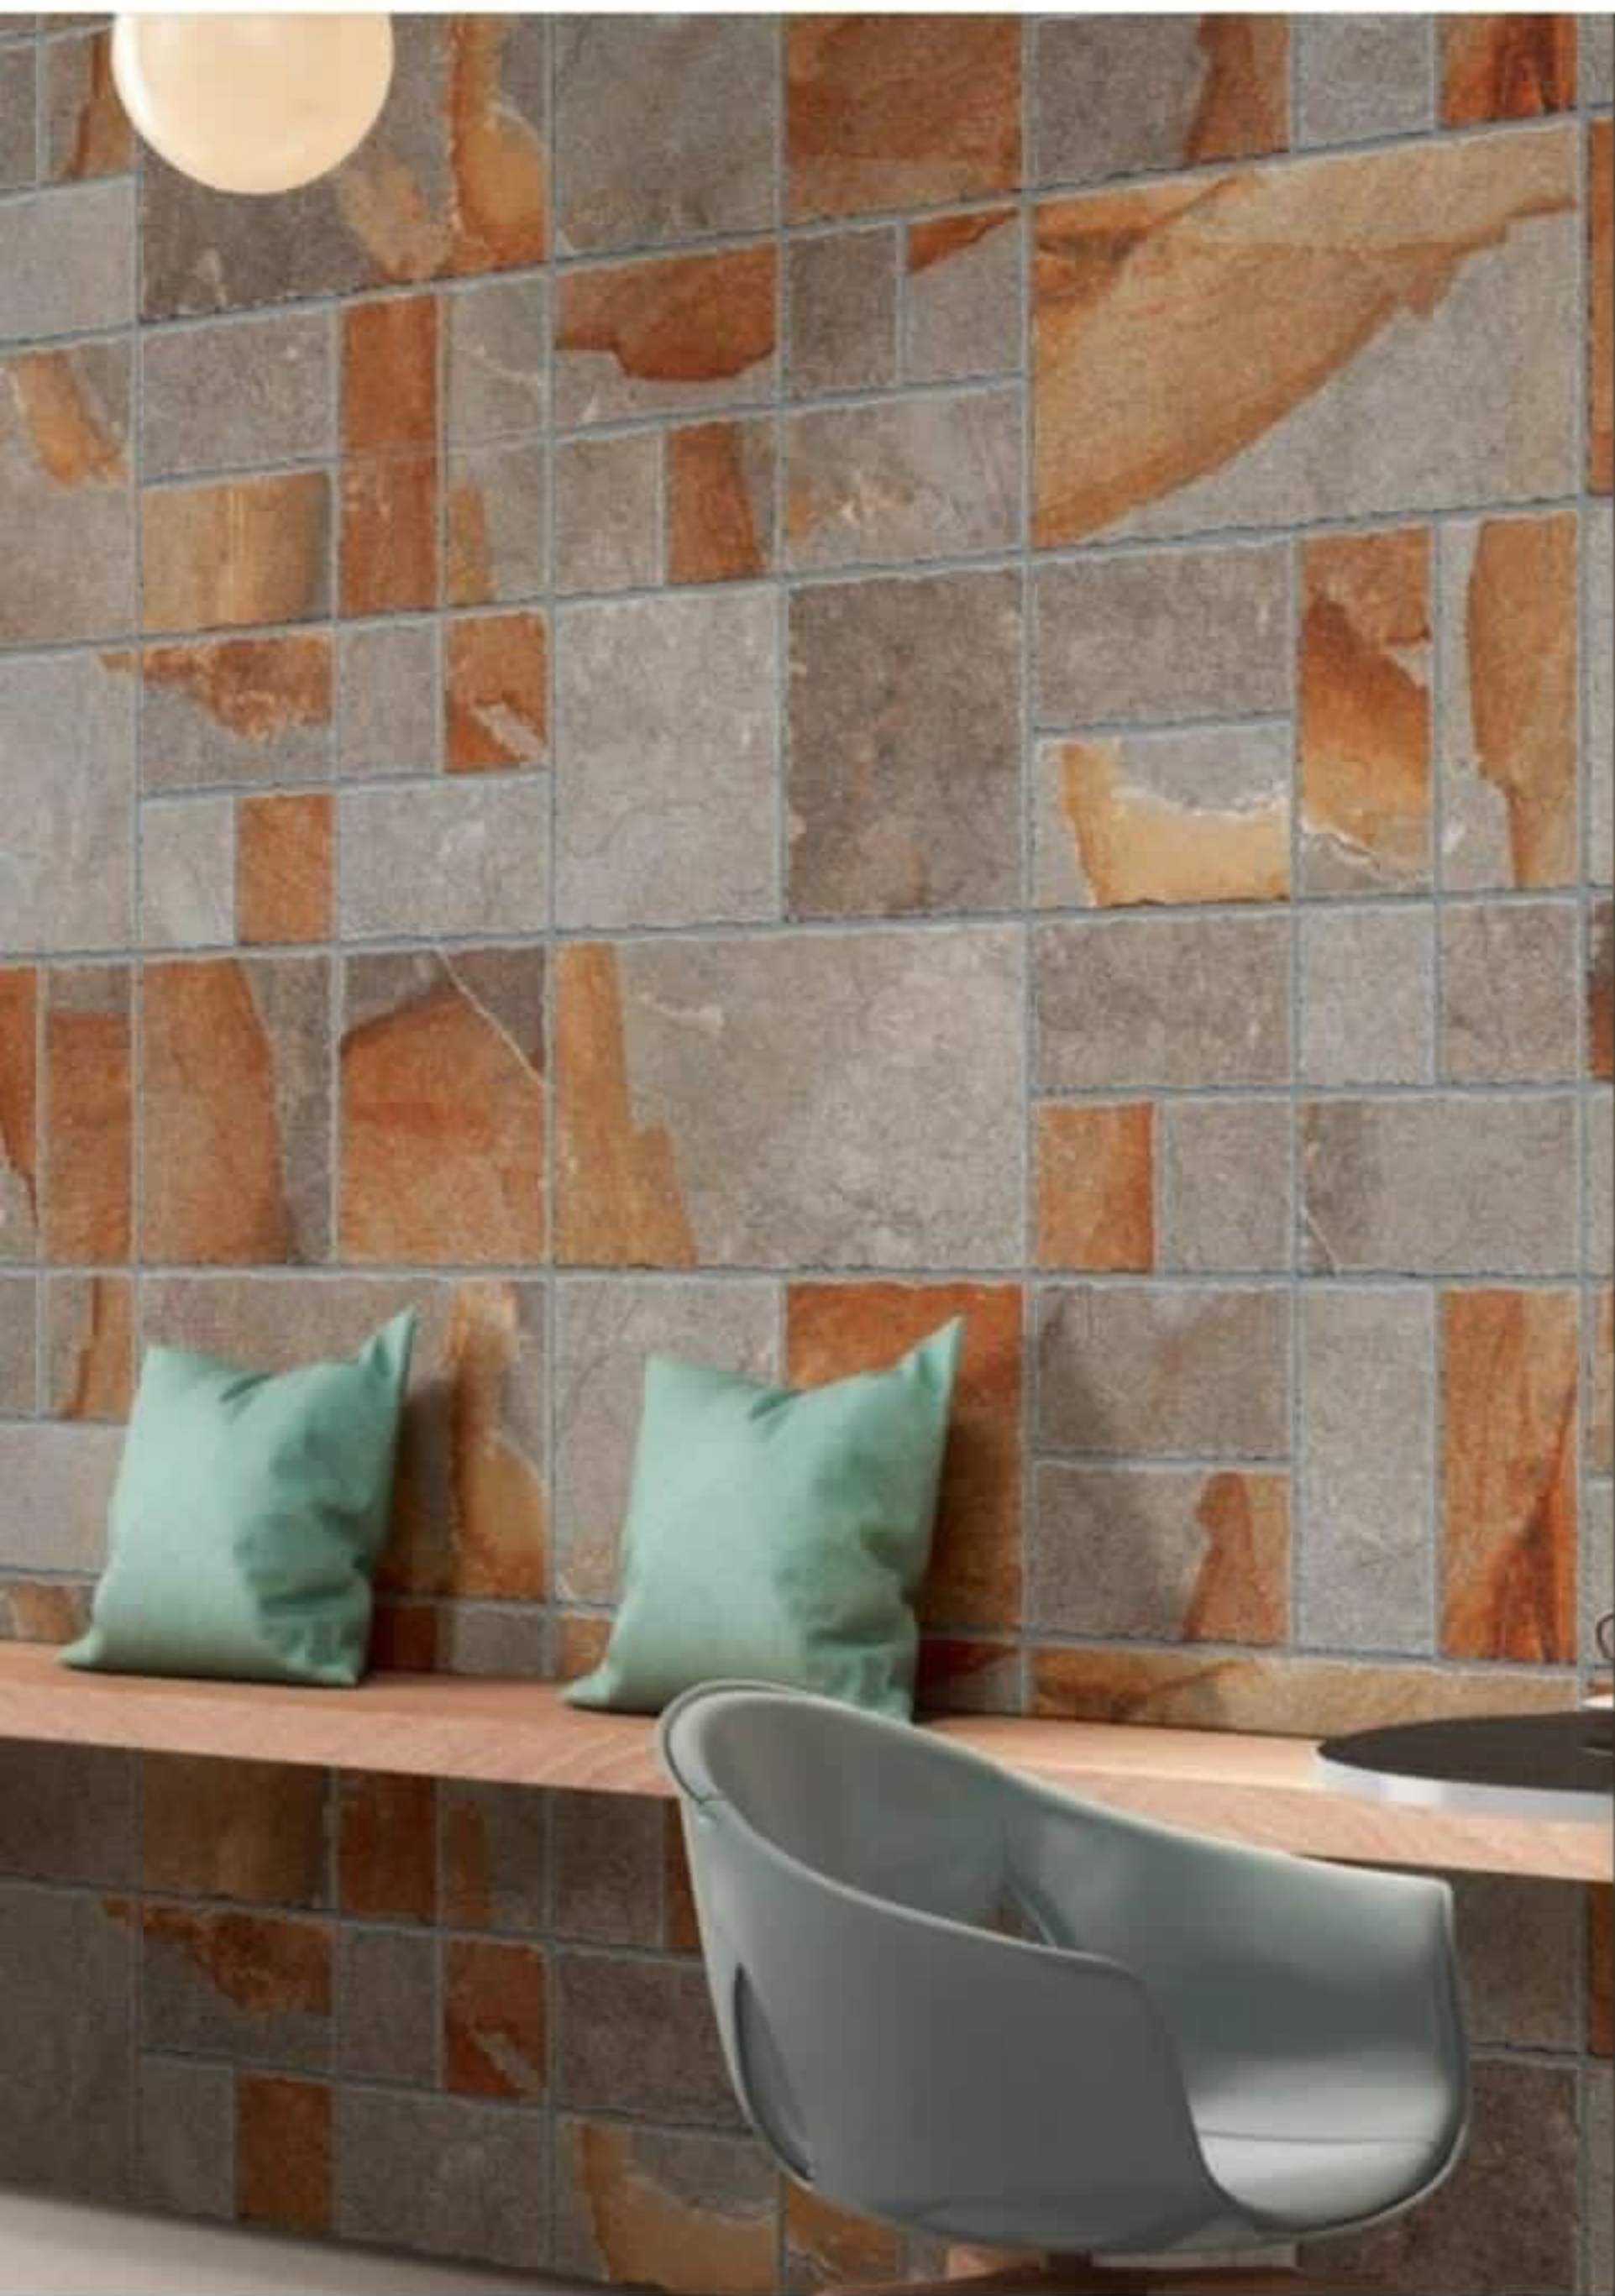

ASPIRE LAVA



ASPIRE ORO




▼ 12MM
▲ Thickness 32 Randoms

Pcs Per Box	Weight Per Box
4 Pcs.	18 kg. (Approx)
Area Coverage	Box Per Pallet
0.72 sqm./per box	72

TECHNICAL FEATURES

- 
ANTI SLIP SURFACE
- 
HYGIENIC SURFACE
- 
FIRE RESISTANCE
- 
EASY MAINTENANCE
- 
HIGH DURABILITY
- 
WATER RESISTANCE

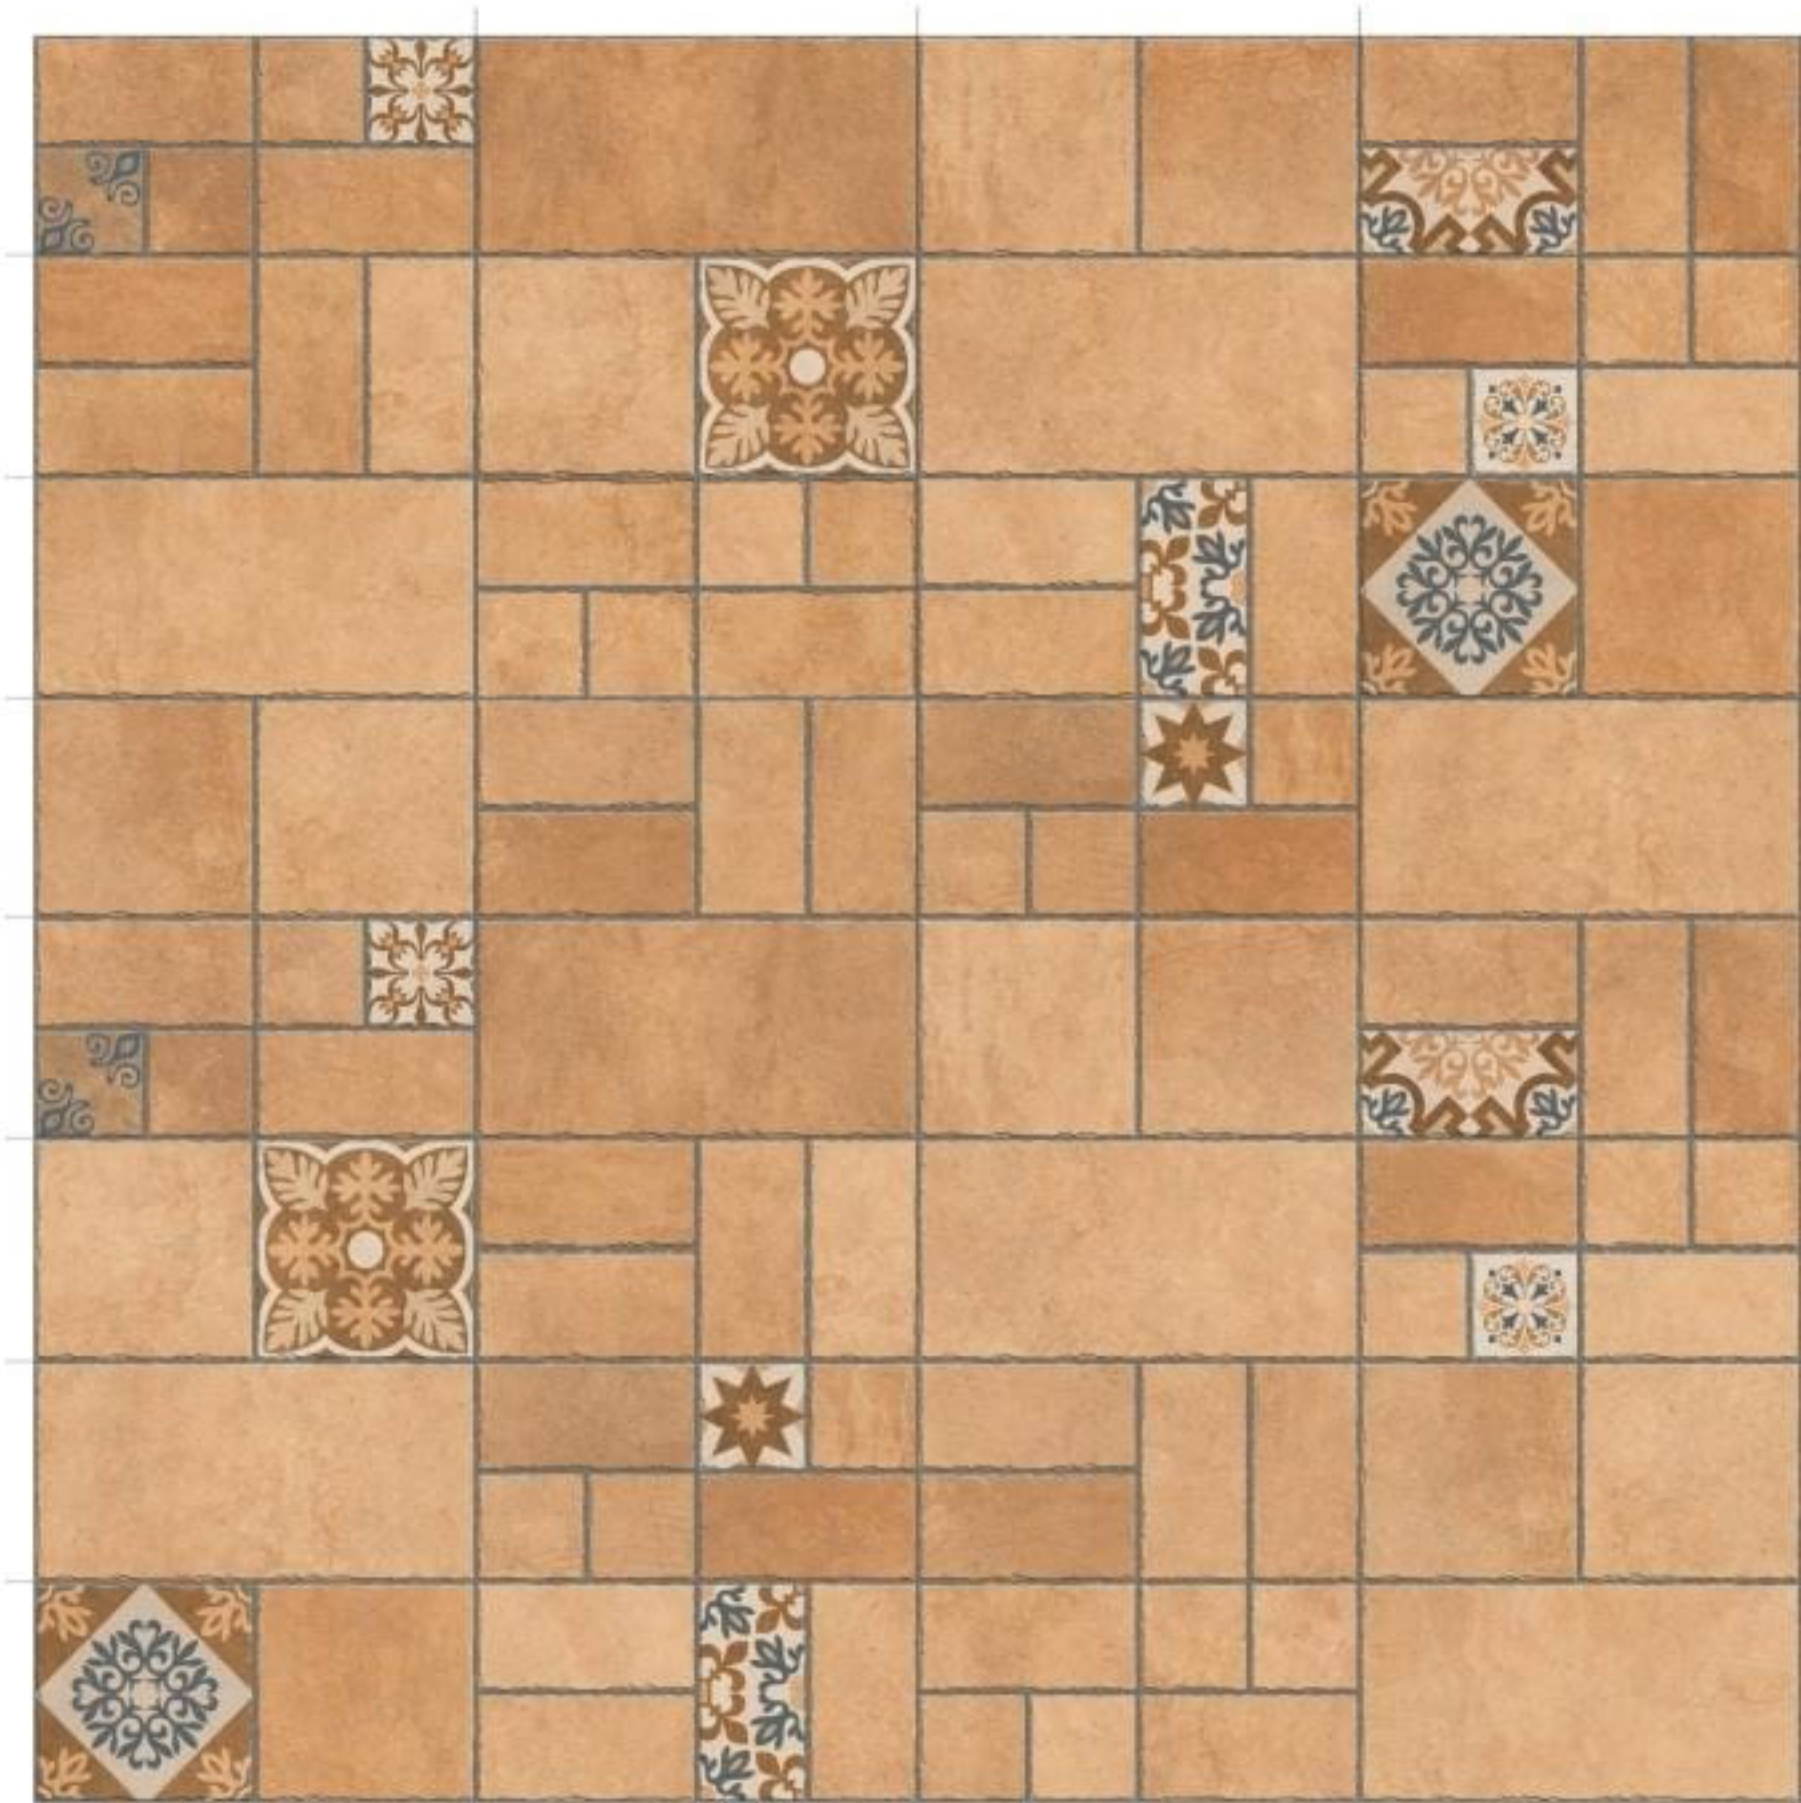



ASPIRE ORO






CITRON COTTO



CITRON COTTO

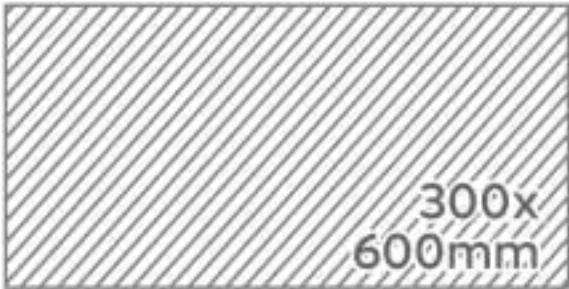


▼ 12MM
▲ Thickness 32
Randoms

Pcs Per Box	Weight Per Box
4 Pcs.	18 kg. (Approx)
Area Coverage	Box Per Pallet
0.72 sqm./per box	72

TECHNICAL FEATURES

- 
ANTI SLIP SURFACE
- 
HYGIENIC SURFACE
- 
FIRE RESISTANCE
- 
EASY MAINTENANCE
- 
HIGH DURABILITY
- 
WATER RESISTANCE

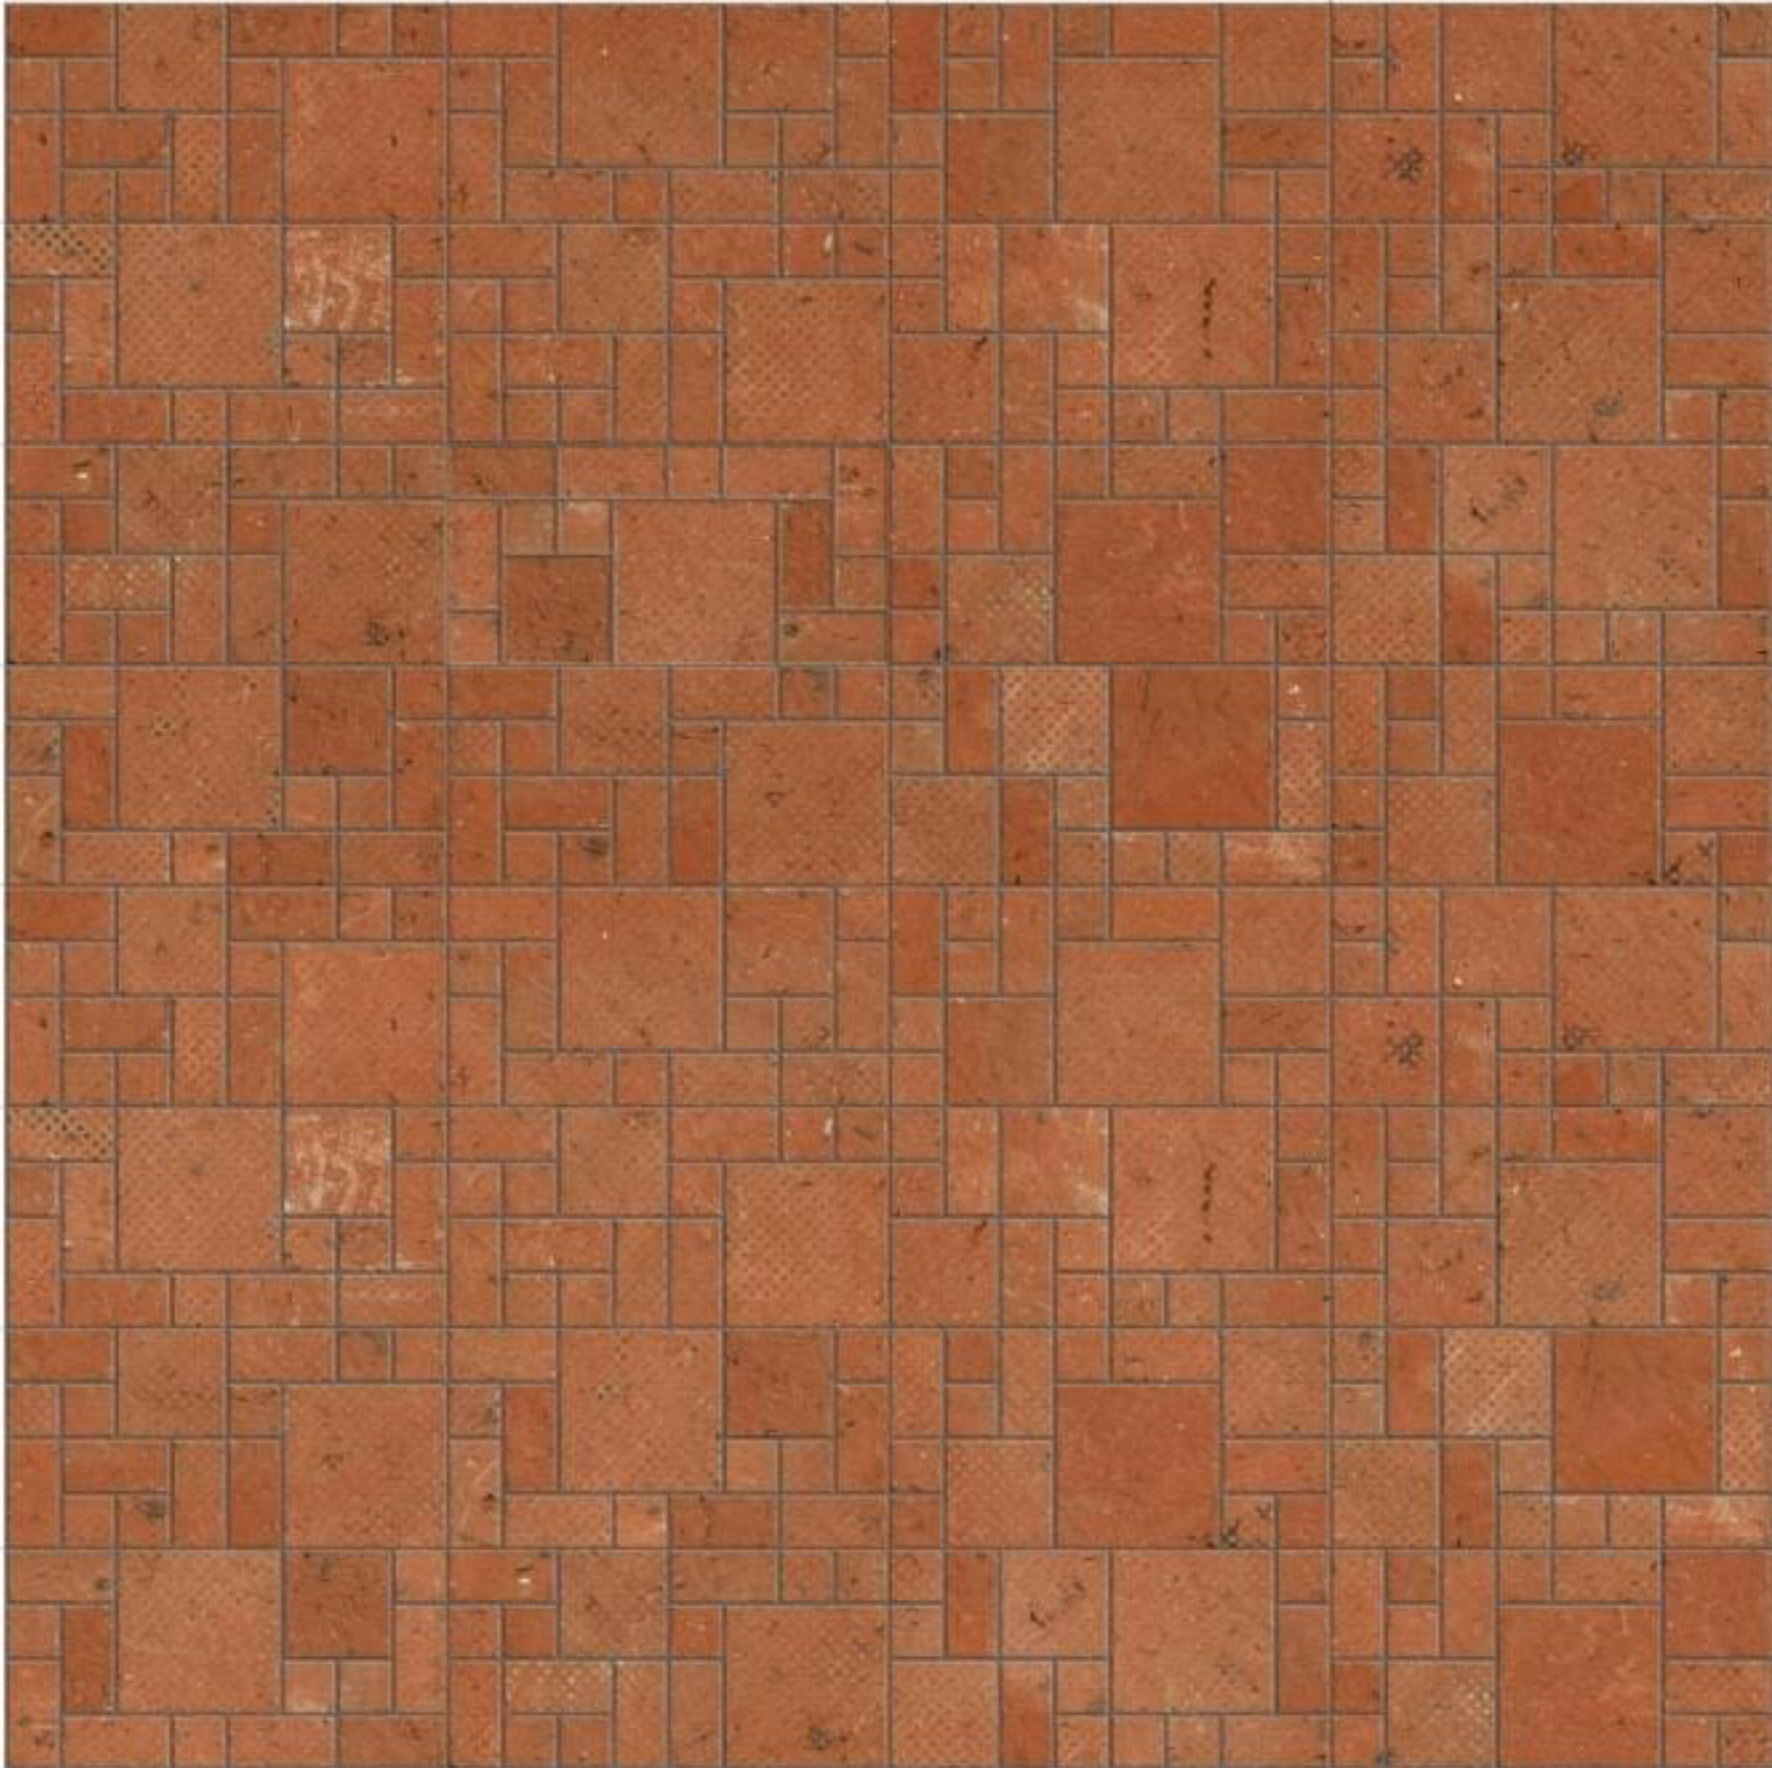





CITRON GREY



▼ 12MM
▲ Thickness | 32
Randoms

Pcs Per Box 4 Pcs.	Weight Per Box 18kg (Approx)
Area Coverage 0.72 sqm per box	Box Per Pallet 72

TECHNICAL FEATURES



ANTI-SLIP
SURFACE



HYGIENIC
SURFACE



FIRE
RESISTANCE




EASY
MAINTENANCE



HIGH
DURABILITY



WATER
RESISTANCE

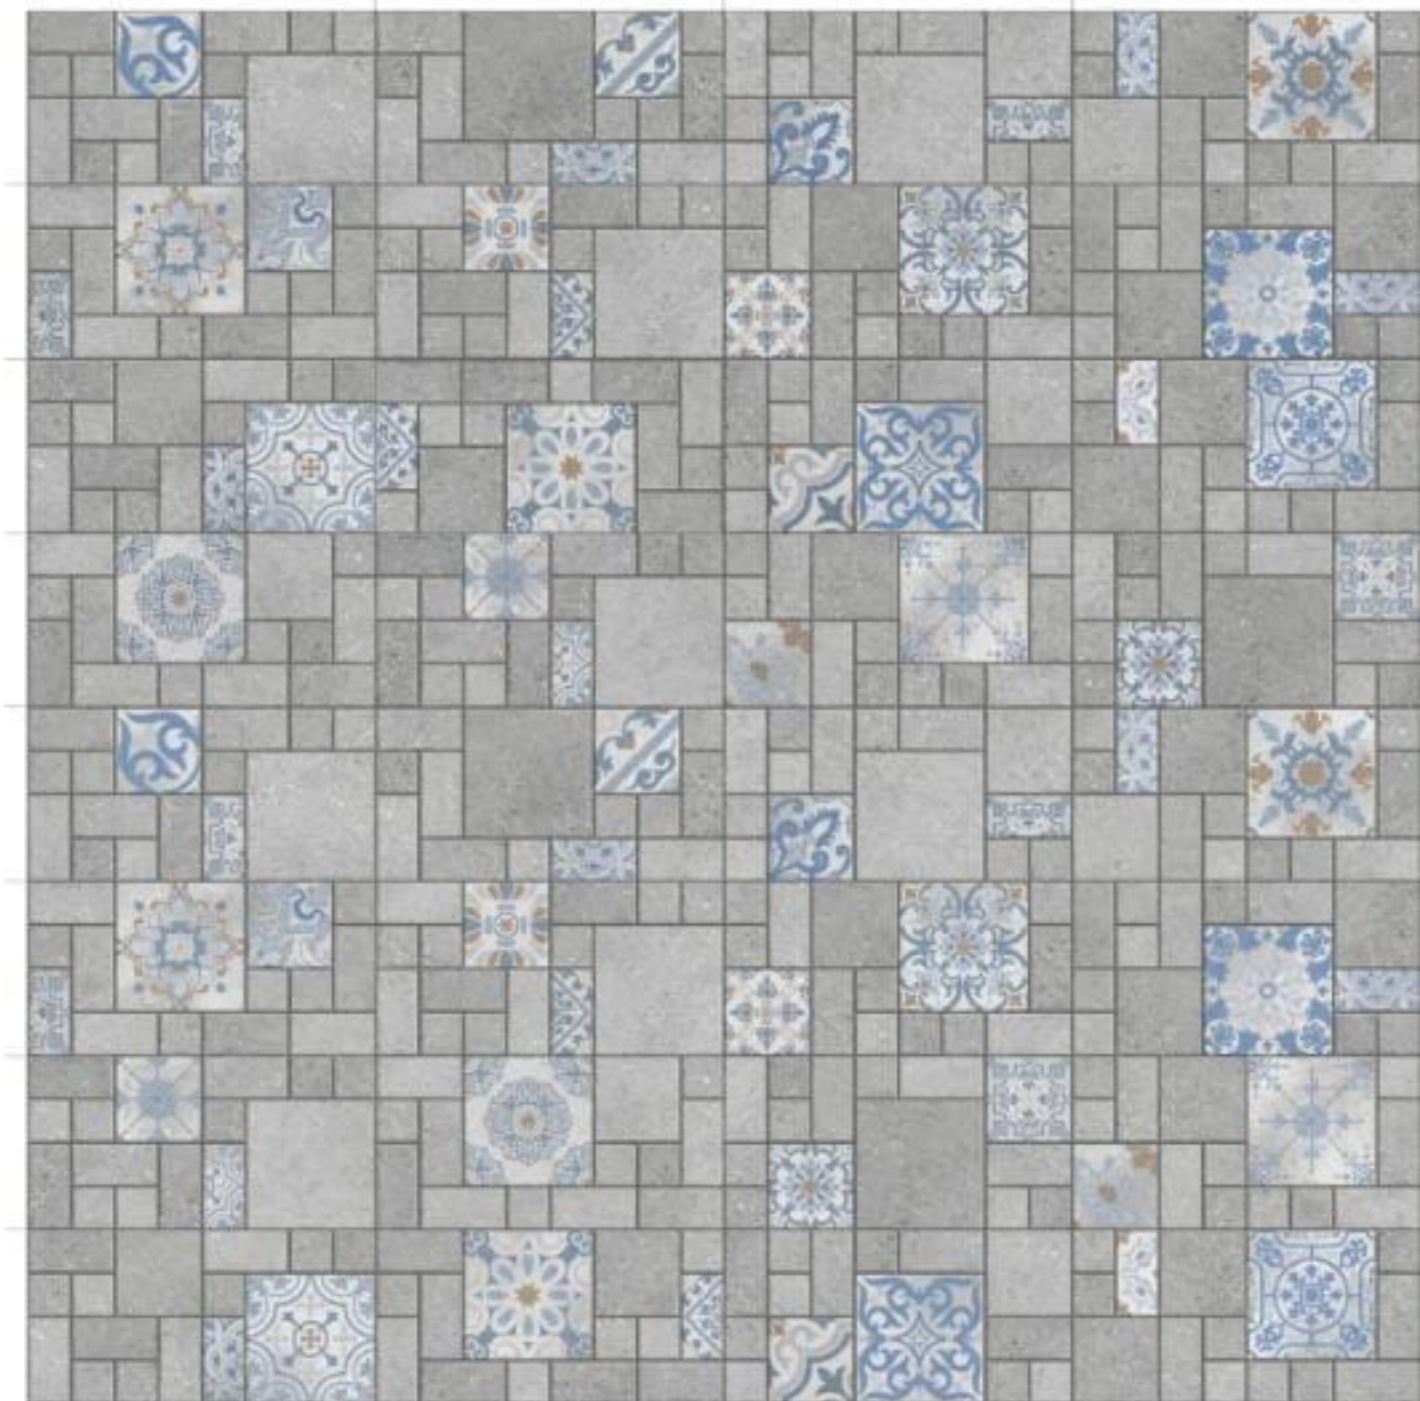

ASPIRE GRECK



▼ 12MM
▲ Thickness | 32
Randoms

Pcs Per Box	Weight Per Box
4 Pcs.	18 kg. (Approx)
Area Coverage	Box Per Pallet
0.72 sqm./per box	72

TECHNICAL FEATURES

- 
ANTI-SLIP SURFACE
- 
HYGIENIC SURFACE
- 
FIRE RESISTANCE
- 
EASY MAINTENANCE
- 
HIGH DURABILITY
- 
WATER RESISTANCE





ASPIRE GRECK



CITRON BEIGE



▼ 12MM
▲ Thickness 32
Randoms

Pcs Per Box 4 Pcs.	Weight Per Box 18 kg (Approx)
Area Coverage 0,72 sqm/pcr box	Box Per Pallet 32

TECHNICAL FEATURES

- ANTI-SLIP SURFACE
- HYGIENE SURFACE
- FIRE RESISTANCE
- EASY MAINTENANCE
- HIGH DURABILITY
- WATER RESISTANCE





CITRON BEIGE





INDELIBLE SINGS OF HISTORY

Our Rustic Matt Finish gives easy solutions to urban areas and heavy traffic places. The best extruded GVT tile with 12 mm thickness and an antislip rate R11. Earth Collection Tiles are highly resistant against abrasion, as well as a strong bending resistance. Earth Collection is perfect for pedestrian areas, squares in the city, traffic areas, entrance pf houses, urban area and all kind of heavy duty areas.



4
RANDOM
MOLD



GROUT
TO BE FILLED
AFTER LAYING



12MM
THICKNESS



RUSTIC
MATT FINISH



ZONAS RESIDENCIALES
RESIDENTIAL AREAS



PASEOS URBANOS
URBAN AREAS



TERRAZAS Y PATIOS
TERRACE & PATIOS



ZONAS COMERCIALES
COMMERCIAL AREAS



PISTINAS
SWIMMING POOLS



JARDINES
GARDENS





Eminence that stands
the test of time

30X60CM
EARTH COLLECTION
(ASPIRE SERIES)





ASPIRE LAVA




▼ 12MM
▲ Thickness | 32
Randoms

Pcs Per Box	Weight Per Box
4 Pcs.	18 kg. (Approx)
Area Coverage	Box Per Pallet
0.72 sqm./per box	72

TECHNICAL FEATURES

- 
ANTI-SLIP SURFACE
- 
HYGIENIC SURFACE
- 
FIRE RESISTANCE
- 
EASY MAINTENANCE
- 
HIGH DURABILITY
- 
WATER RESISTANCE

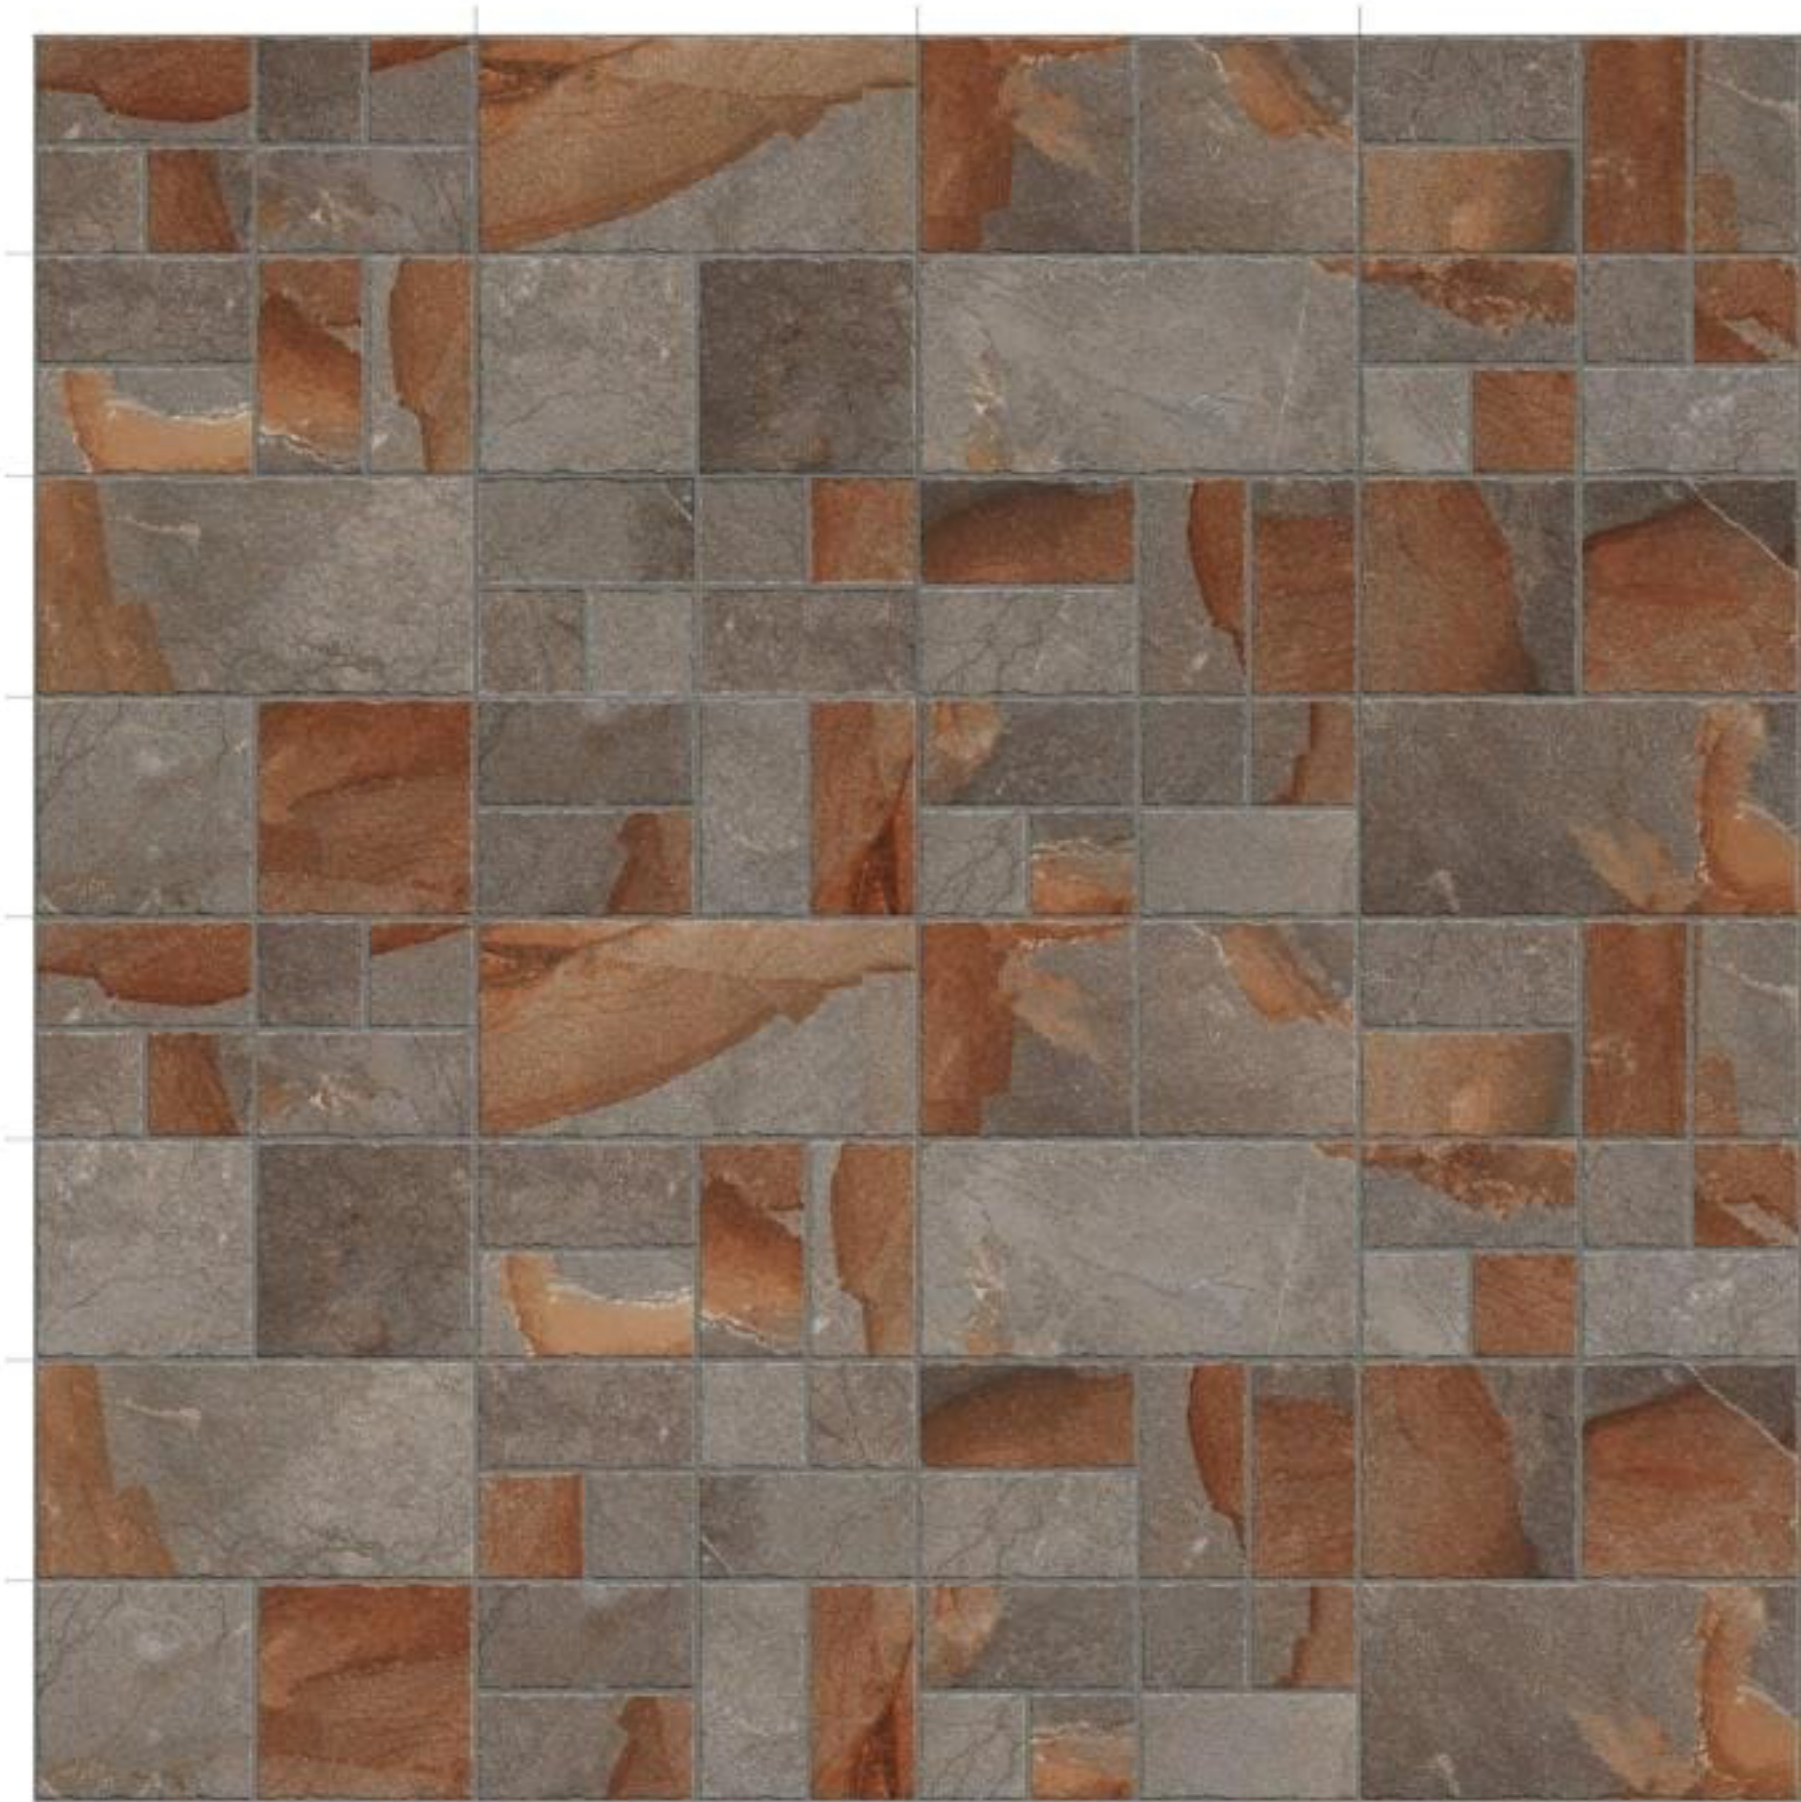

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS - GLAZED VITRIFIED TILES (GROUP BIa)

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 10545/EN 126 GROUP BIa	PORCELAIN VALUE
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±4%
Straightness Of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	<0.5%	<0.2%
Mohs Hardness	EN-101	Min.3	Min.3
Flexural Strength	ISO-10545-4	>35 N/mm ²	>40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	-	<0.2 (R9)
Breaking Strength	ISO-10545-11	>1113 N	>1800 N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	-	PEI III & IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TECHNICAL SPECIFICATIONS - CERAMIC TILES

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BIa	CERAMIC VALUE
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-02	±0.20%	±0.10%
Deviation in Thickness	ISO-10545-02	±7.00%	±0.10%
Straightness Of Sides	ISO-10545-02	±0.15%	±0.10%
Rectangularity	ISO-10545-02	±0.20%	±0.15%
Surface Flatness	ISO-10545-02	±0.30%	±0.20%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-03	<10%	16±2%
Mohs Hardness	EN-101	Min. Class 3	Compliant
Flexural Strength	ISO-10545-04	R >15 N/mm ²	Compliant
Skid Resistance (Friction Coefficient)	ISO-10545-08	<9.0 x 10 ⁻³ EC ⁻¹	Compliant
Breaking Strength	ISO-13630-06	600 Min.	Compliant
Frost Resistance	ISO-13630-03	0.04 mm/M Max.	Compliant
Thermal Shock Resistance	ISO-10545-09	Min. 10 Cycles	Compliant
Moisture Expansion	ISO-13630-03	0.04 mm/M Max.	Passed 10 Cycle
Resistance to Surface Abrasion	ISO-13630-14	0.55 Min.	4 Cycle Passed
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	As per Mfg.	No visible effect
Color Resistance	ISO-10545-13	Class AA Min.	Compliant
Stain Resistance	ISO-10545-14	Class 1 Min.	Compliant

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS - GLAZED VITRIFIED TILES (GROUP BIa)

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 10545/EN 126 GROUP BIa	PORCELAIN VALUE
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-2	±0.6%	±0.2%
Deviation in Thickness	ISO-10545-2	±5%	±4%
Straightness Of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	<0.5%	<0.2%
Mohs Hardness	EN-101	Min.3	Min.3
Flexural Strength	ISO-10545-4	>35 N/mm ²	>40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	-	<0.2 (R9)
Breaking Strength	ISO-10545-11	>1113 N	>1800 N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	-	PEI III & IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TECHNICAL SPECIFICATIONS - CERAMIC TILES

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 126 GROUP BIa	CERAMIC VALUE
DIMENSION & SURFACE QUALITY			
Deviation in Length	ISO-10545-02	±0.20%	±0.10%
Deviation in Thickness	ISO-10545-02	±7.00%	±0.10%
Straightness Of Sides	ISO-10545-02	±0.15%	±0.10%
Rectangularity	ISO-10545-02	±0.20%	±0.15%
Surface Flatness	ISO-10545-02	±0.30%	±0.20%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-03	<10%	16±2%
Mohs Hardness	EN-101	Min. Class 3	Compliant
Flexural Strength	ISO-10545-04	R >15 N/mm ²	Compliant
Skid Resistance (Friction Coefficient)	ISO-10545-08	<9.0 x 10 ⁻² EC ⁻¹	Compliant
Breaking Strength	ISO-13630-06	600 Min.	Compliant
Frost Resistance	ISO-13630-03	0.04 mm/M Max.	Compliant
Thermal Shock Resistance	ISO-10545-09	Min. 10 Cycles	Compliant
Moisture Expansion	ISO-13630-03	0.04 mm/M Max.	Passed 10 Cycle
Resistance to Surface Abrasion	ISO-13630-14	0.55 Min.	4 Cycle Passed
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	As per Mfg.	No visible effect
Color Resistance	ISO-10545-13	Class AA Min.	Compliant
Stain Resistance	ISO-10545-14	Class 1 Min.	Compliant